

## DRY LINING TRIMS DATA SHEET

## EXTRUDED ARCHITECTURAL ALUMINIUM




## **APPLICATION**


Type E trims are used to create vertical or horizontal straight edges at the end of a run of plasterboard, or where a raised or recessed feature is required. The trims can be used in both wall and ceiling applications and can be factory formed into column rings.

## **PRODUCT INFORMATION**

Supplied in 3000mm lengths, extruded from architectural grade aluminium alloy to BS 1474. Pre-punched with diagonal fixing slots and holes suitable for fixing by drywall screws. The standard finishes are white polyester powder coating to RAL 9010, 20% Gloss, or to order in a full palette of RAL colours, to match and enhance any interior scheme. Unpainted trims also available for onsite painting/spraying, please check with your paint supplier for any additional primer products that may be required. QIC cannot accept any responsibility for the painted finish of products supplied unpainted. Non-stan-dard lengths and alternative factory applied finishes are available to special order. Trims with a custom dimension between 3mm-100mm are available to special order.

**Special Colours** 



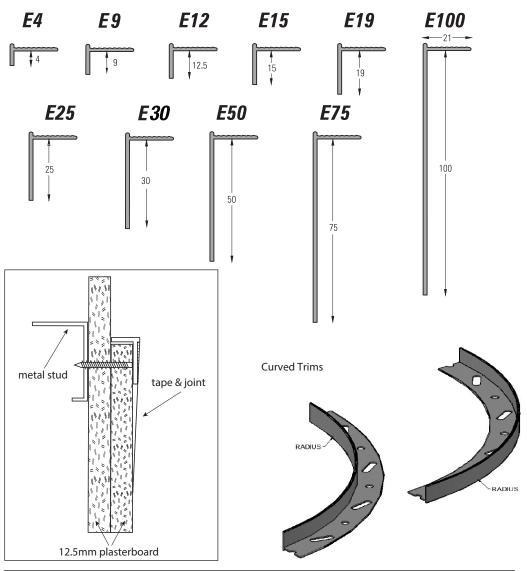

QicTrims UK Ltd Radclive Road, Gawcott, Bucks, MK18 4BL (UK)
Phone: 01280 818950 Fax: 01280 818955 Email: sales@qic-trims.com

