



SUSPENDED CEILING TRIMS DATA SHEET

CEILING RAFT SOLUTION

- TYPE**
- US01**
 - US02**
 - US04**
 - US50**


APPLICATION

Type US trims are used to create an upstand perimeter to areas of all types of suspended ceiling systems. Type US trims are commonly used to form the upstand around a floating island area of a suspended ceiling which is suspended below the main ceiling area. These can be curved on plan to both concave and convex radii to form curved edge ceiling layouts.


PRODUCT INFORMATION

Supplied in 3000mm lengths, extruded from architectural grade aluminium alloy to BS 1474. The standard finishes are white polyester powder coating to RAL 9010, 20% Gloss, or to order in a full palette of RAL colours, to match and enhance any interior scheme. Unpainted trims also available for onsite painting/spraying, please check with your paint supplier for any additional primer products that may be required. QIC cannot accept any responsibility for the painted finish of products supplied unpainted. Non-standard lengths, factory curving and alternative factory applied finishes are available to special order. Cleats to form straight joints, internal and external corners and abutment details are also available to order separately.


US01

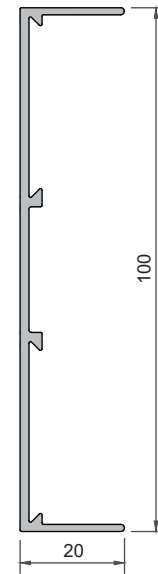

US02

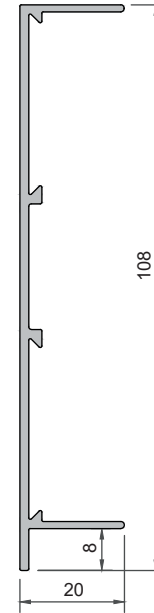

US04

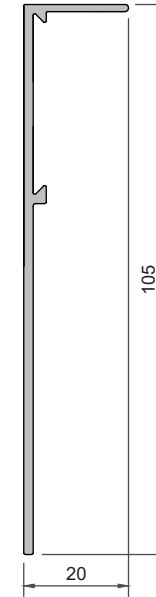

US50

