

APPLICATION

Type US300 profile trims are used as a full tile closure panel in linear or tartan grid metal suspended ceiling systems. The horizontal web of the shadow gap designs can be factory slotted to form an air vent if required.

PRODUCT INFORMATION


Supplied in 3000mm lengths, extruded from architectural grade aluminium alloy to BS 1474. The standard finishes are white polyester powder coating to RAL 9010, 20% Gloss, or to order in a full palette of RAL colours, to match and enhance any interior scheme. Unpainted trims also available for onsite painting/spraying, please check with your paint supplier for any additional primer products that may be required. QIC cannot accept any responsibility for the painted finish of products supplied unpainted. Non-standard lengths, factory curving and alternative factory applied finishes are available to special order. Cleats for straight joints, internal or external corners and abutment details are available – see separate data sheet.

PACKING

Packed in quantities as ordered with no bundle exceeding 25kgs. Packaging is by heavy gauge heat shrink polythene with corrugated cardboard end protection.

TECHNICAL DETAILS

Designed specifically for use as part of a conventional metal ceiling system. Special colours available on request.

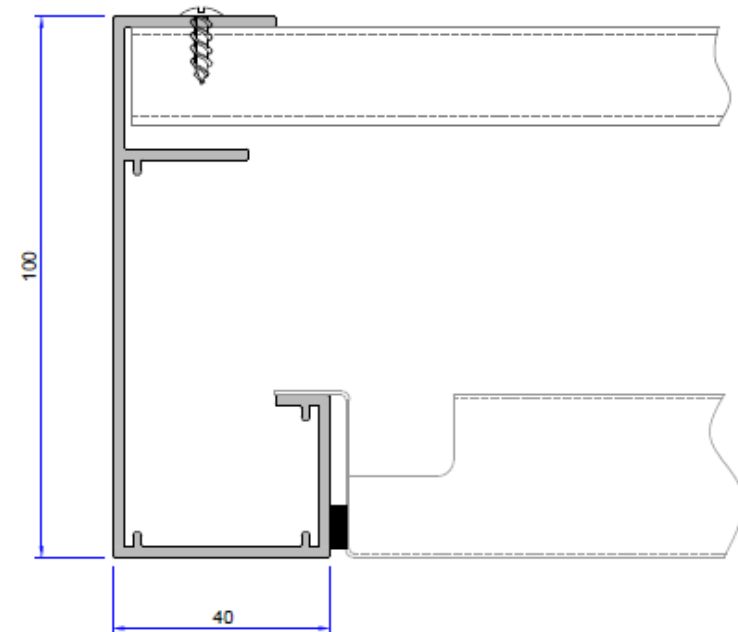

Installation Detail