

SUSPENDED CEILING TRIMS DATA SHEET

EXTRUDED ARCHITECTURAL ALUMINIUM





APPLICATION


Type AG trims are used to create a crisp perimeter detail where mineral fibre, g.r.g, plasterboard or full module metal ceiling tile systems abut walls, partitions or upstands. All angles can be formed into column rings.


PRODUCT INFORMATION


Supplied in 3000mm lengths, extruded from architectural grade aluminium alloy to BS 1474. The standard finishes are white polyester powder coating to RAL 9010, 20% Gloss, or to order in a full palette of RAL colours, to match and enhance any interior scheme. Unpainted trims also available for on-site painting/spraying, please check with your paint supplier for any additional primer products that may be required. QIC cannot accept any responsibility for the painted finish of products supplied unpainted. Non-standard lengths, factory curving and alternative factory applied finishes are available to special order. Cleats to form straight joints, internal and external corners and abutment details when used with AG01 and AG02 are also available to order separately.

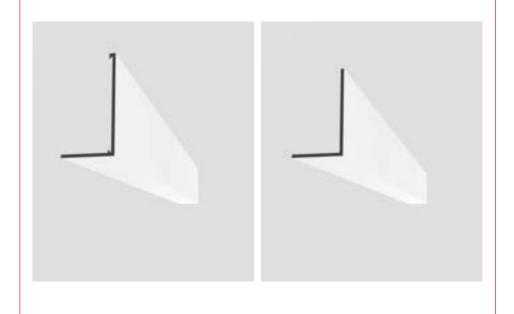












QicTrims UK Ltd Radclive Road, Gawcott, Bucks, MK18 4BL (UK)
Phone: 01280 818950 Fax: 01280 818955 Email: sales@qic-trims.com





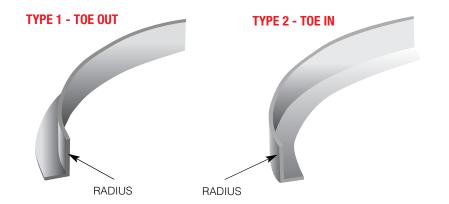

CURVED AG PROFILES



Column rings also available to order

PRODUCT ORDER FORM

CUSTOMER:

ITEM:	1	2	3	4
PROFILE TYPE:				
SIZE:				
QUANTITY:				
CURVE TYPE				
FINISH:				
RADIUS:				

Please check the above details are correct and return by email to sales@qic-trims.com or fax to 01280 818955. It is assumed that e-mails & fax returns are approval signatures. QIC cannot accept responsibility for errors.

SIGNED:	(PRINT NAME)	DATE: