DRYLINING TRIMS DATASHEET

TYPE:
XT

APPLICATION

Type XT trims are used to create a shadow gap junction detail between areas of spring tee metal ceiling tiles and adjacent plasterboard areas.

PRODUCT INFORMATION

QIC Trims are supplied in 3000mm lengths, extruded from architectural grade aluminium alloy in accordance with BS EN 755-9. Profiles are pre-punched with diagonal fixing slots and holes suitable for fixing with drywall screws.

Standard finishes are available in white polyester powder coating to RAL 9010, 20% gloss, or to order in a full palette of RAL colours to match and enhance any interior scheme.

Non-standard lengths, custom reveal sizes, factory curving, and alternative factory-applied finishes are available to special order.

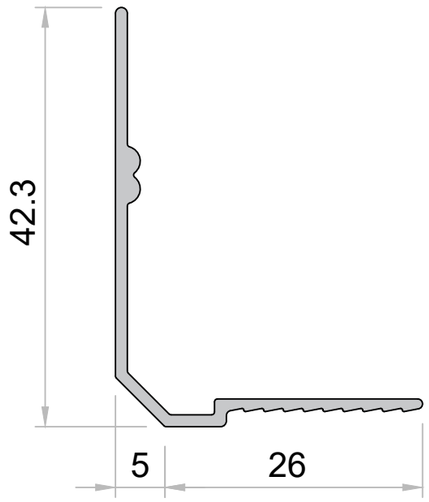

XT0

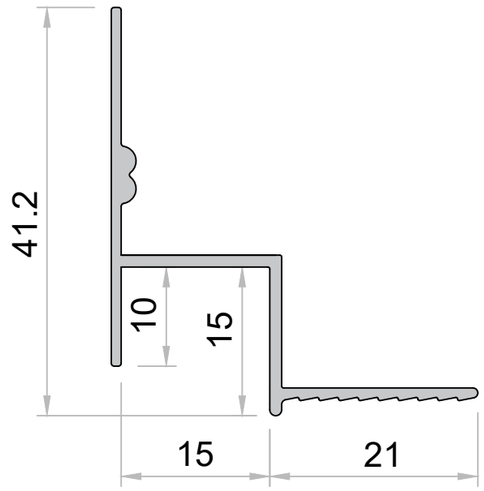

XT15

This drawing is confidential and the copyright therein is owned by QIC Trims Limited. This drawing must not be copied, loaned or the information otherwise disclosed without the written permission of QIC Trims Ltd.